

5MP 4 in 1 Sony Bullet Camera


HD Analog Signal AHD, TVI, CVI, CVBS switch by OSD

ILink Professionals

Specifications

Model NO.	iHDIRBFIO-5SN2
Video Output Mode	AHD/TVI/CVI 5M@25fps; CVBS 960H
Camera	
Image Sensor	SONY Starvis IMX335
Image Resolution	5.0 MP
Effective Pixels	5M:2592*1944
TV System	PAL/NTSC
Video Output Mode	AHD/TVI/CVI 5M@25fps; CVBS 960H
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s
S/N Ratio	≥50dB
Scanning System	Progressive Scan
Lens	
Focus Length	Board Lens 3.6mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	5M Pixels
Auto Iris Support	N/A
Night Vision	
Infrared LED	¢ 28 <mark>X6</mark> PCS
Infrared Distance	30M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Camera Features	
Starlight	1
Day/Night	YES
OSD Menu Language	YES
White Balance	AUTO / MANUAL
Gain Control	AUTO
Noise Reduction	DNR
Picture TVjustment	YES
WDR	DWDR
OSD Support	YES
Dip Switch	N/A
General	
Waterproof	IP66
Dual Voltage	N/A
IR Cut Filter	YES
Heater	N/A
Audio	N/A
Operation Temperature	-10°C ∼ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%,550mA
Dimension	175(W) x 69(H) x55(D)mm
Weight	600g

Mode switch by OSD

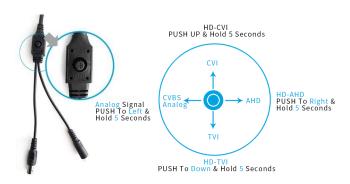

Multi-function

■ 2D/3D-NR





Defog



DWDR



