

5MP 4 in 1 Sony Dome Camera


HD Analog Signal AHD, TVI, CVI, CVBS switch by OSD



Specifications

| Model NO. | iHDIRDFIO-5KF |
|-----------------------|-----------------------------------|
| Video Output Mode | AHD TVI CVI CVBS |
| Camera | |
| Image Sensor | K03 + FH8538M |
| Image Resolution | 5.0 MP |
| Effective Pixels | 2592×1944 |
| TV System | PAL/NTSC |
| Video Output Mode | AHD/CVI/TVI: 5Mp@30fps |
| Electronic Shutter | 1/25s~1/50,000s , 1/30s~1/60,000s |
| S/N Ratio | ≥50dB |
| Scanning System | Progressive Scan |
| Lens | |
| Focus Length | Board Lens 3.6mm |
| Focus Control | Fixed |
| Lens Type | Fixed |
| Pixels | 5M Pixels |
| Auto Iris Support | N/A |
| Night Vision | |
| Infrared LED | 14 μ X12 PCS |
| Infrared Distance | 2 <mark>0M</mark> |
| R Status | Under 10 Lux by CDS |
| IR Power On | CDS Auto Control |
| Camera Features | |
| Starlight | N/A |
| Day/Night | YES |
| OSD Menu Language | N/A |
| White Balance | AUTO / MANUAL |
| Gain Control | AUTO |
| Noise Reduction | DNR |
| Picture TVjustment | YES |
| WDR | DWDR |
| OSD Support | N/A |
| Dip Switch | N/A |
| General | |
| Waterproof | YES |
| Dual Voltage | N/A |
| IR Cut Filter | YES |
| Heater | N/A |
| Audio | N/A |
| Operation Temperature | -10 ~ +50 RH95% Max |
| Storage Temperature | -20 ~ +60 RH95% Max |
| Power Source | DC12V±10%,550mA |
| Dimension | ⊄ 94 x 69(H) mm |
| Weight | 1.5lbs |

Mode switch by OSD

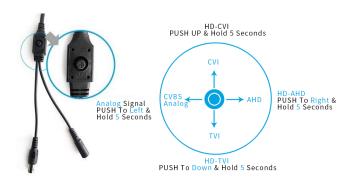

Multi-function

■ 2D/3D-NR





Defog



DWDR



